
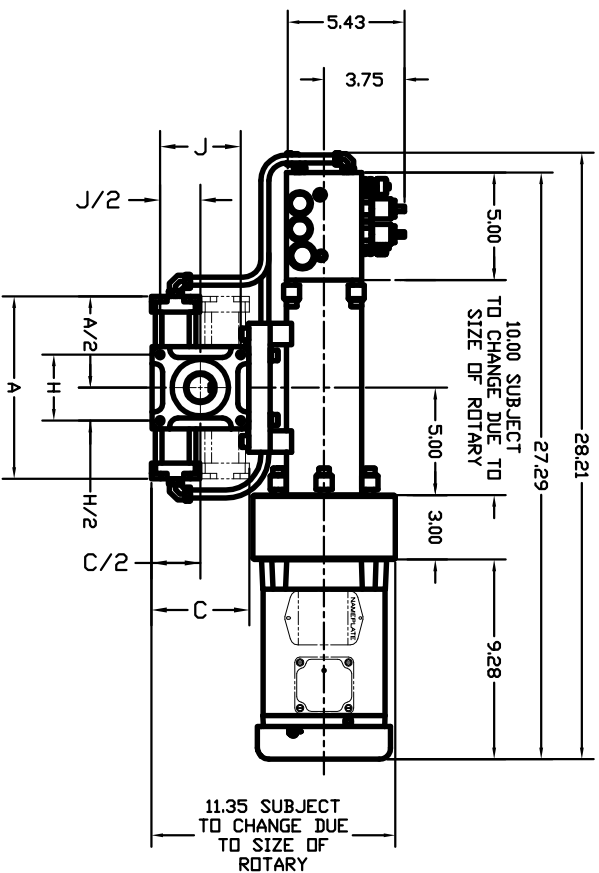


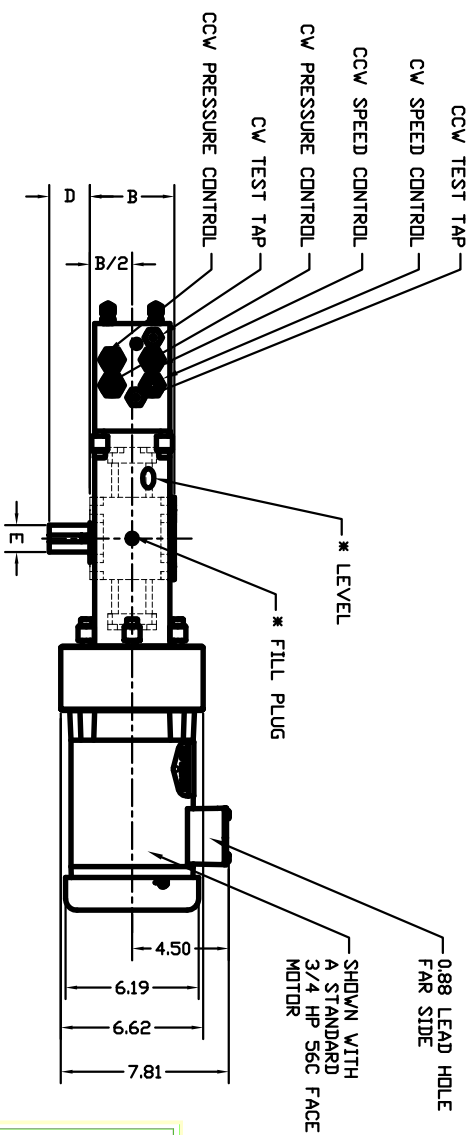

MODEL NO.	# OF REVS	ROTATION DEGREES	A	B	C	D	E	F	G	H	J	K	L	M	N
KR-750	1	180°	6.31	8.19	11.96	2.08	3.00	1.31	0.8735 0.8750	1/2" NPT 1"	2.63	2.38	5/16" NC 3/8" N	0.625 0.627	0.187 0.188
KR-1500	2	90°	6.31	8.19	11.96				SAE			DP			
KR-3000	1	180°	11.24	16.73	3.04	4.50	1.88	1.248 1.250	5/16" NPT 1"	3.00	3.63	3/8" NC 5/8" N	3.82 0.875	0.187 0.188	
KR-6000	2	90°	8.49	11.24	16.73			1/2"	SAE			DP			
KR-12500	1	180°	12.79	17.19	5.25	6.88	3.38	2.248 2.250	9/16" NPT 1"	4.75	4.88	3/4" NC 1 1/4" N	6.75 1.500	0.375 0.376	
KR-25000	2	90°	12.79	17.19	5.25	6.88	3.38	2.248 2.250	9/16" NPT 1"	4.75	4.88	3/4" NC 1 1/4" N	6.75 1.500	0.375 0.376	
KR-50000	2	90°	12.79	17.19	5.25	6.88	3.38	2.248 2.250	9/16" NPT 1"	4.75	4.88	3/4" NC 1 1/4" N	6.75 1.500	0.375 0.376	
KR-125000	1	180°	24.60	33.39	8.63	11.5	4.50	2.998 3.000	3/4" NPT 1"	7.38	9.13	1" NC 1 1/2" N	9.63 2.750	0.625 0.626	
KR-250000	2	90°	24.60	33.39	8.63	11.5	4.50	2.998 3.000	3/4" NPT 1"	7.38	9.13	1" NC 1 1/2" N	9.63 2.750	0.625 0.626	
KR-500000	2	90°	24.60	33.39	8.63	11.5	4.50	2.998 3.000	3/4" NPT 1"	7.38	9.13	1" NC 1 1/2" N	9.63 2.750	0.625 0.626	

- NOTES:
1. Standard mount face and bolt pattern shown. Optional mounting available.
 2. Standard male shaft shown for each model. Option shafts available.
 3. Fail safe, limit switches, position transmitters, visual indicators and manual pumps available.
 4. Please contact The Kerry Company for any special applications.
 5. Standard units are not designed for continuous operation of motor.
 6. Dimensions are not certified for construction.
 7. Horsepower rating of motors depend on torque and speed required.